



Traffic Bollards & Post

Item No: STB03X

**STB033 Solar Traffic Bollards**

Material: Enhanced Engineering PC
 Size: Dia.60 cm X 80 cm
 Ultra bright Yellow LEDs inside
 Work type: Flashing 2 HZ
 Activation Mode: Light Sensor (Auto-turn on when getting dark)
 Rechargeable Anti heat li-on battery
 Power Storage Protection: Over-charge/ discharge protection
 Working Time (Full Charge): over 5 days(optional)
 Perfect water proof: IPX65
 Operation Temp (Celsius): -20 °C ~ 70 °C
 Visibility: over 500 meters

STB031 Solar Traffic Bollards


Input Voltage: 220V AC,
 Power: 30Wt
 Material: HD PE
 Size: 97 cm X 34 cm X 32 cm
 Ultra bright Yellow LEDs inside
 Work type: Flashing 2 HZ
 Activation Mode: Light Sensor (Auto-turn on when getting dark)
 Perfect water proof: IPX65
 Operation Temp (Celsius): -20 °C ~ 70 °C
 Visibility: over 500 meters

**STB032 Solar Traffic Bollards**

Input Voltage: 220V AC,
 Power: 30Wt
 Material: HD PE
 Size: 50 cm X 28 cm X 102 cm
 Ultra bright Yellow LEDs inside
 Work type: Flashing 2 HZ
 Activation Mode: Light Sensor (Auto-turn on when getting dark)
 Perfect water proof: IPX65
 Operation Temp (Celsius): -20 °C ~ 70 °C
 Visibility: over 500 meters



Item No: STB80 Solar Traffic Post Bollards

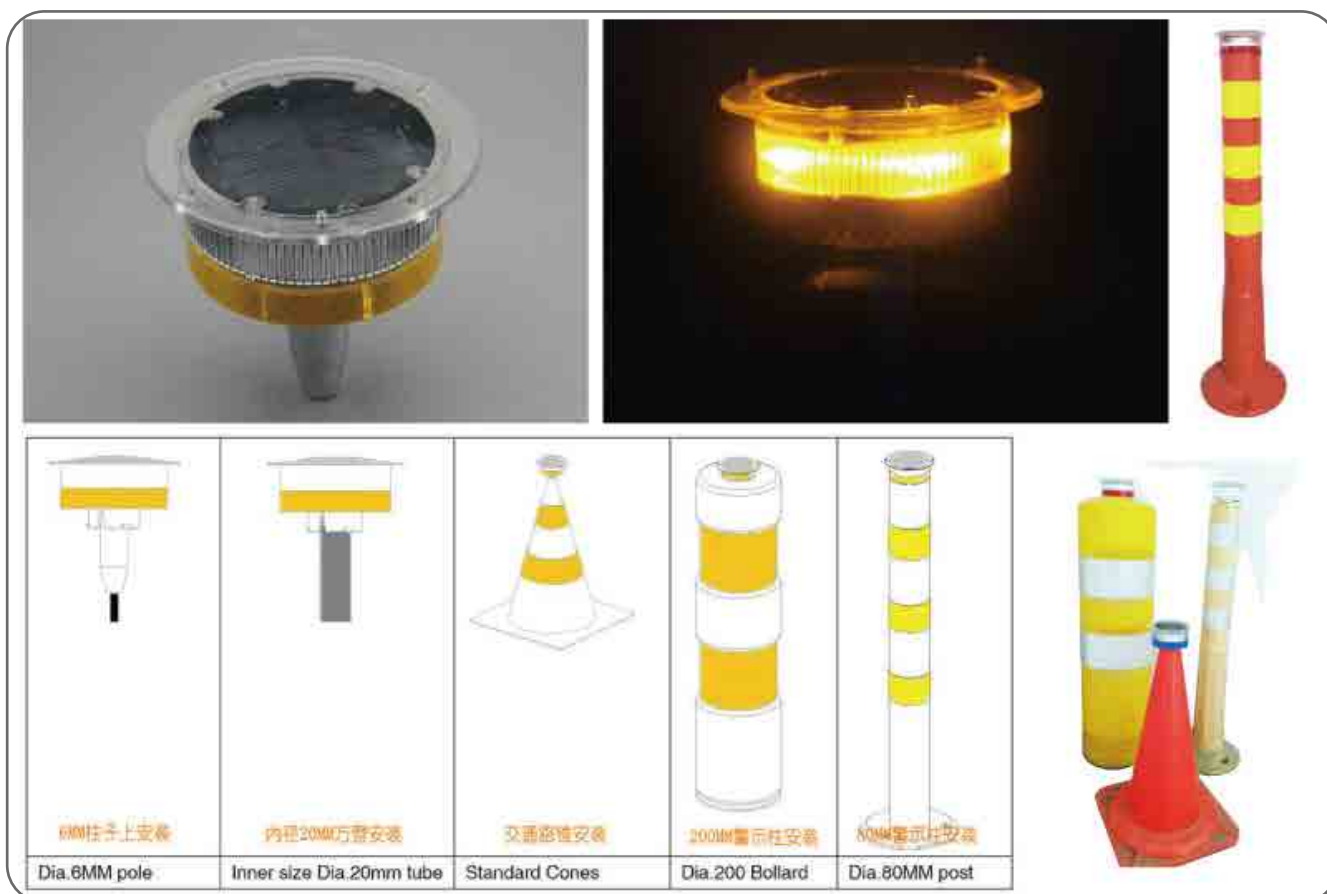

Key Features

1. Multi Usage Design
2. Good Visible Warning Performance
3. Easy Installation

Specification

Size: Dia.80mm
 Working type: Flashing 2 HZ
 Working type after full charge: over 150 hours (Flashing)
 Start working from 500 Lux
 Material: PC
 Solar Cell type: Mono crystalline
 Work temperature: -20℃ ~ +70℃
 Ultra bright LEDs, use life over 100 000 hours
 Color: White, yellow, red, blue, green (optional)

Project Reference




Item No: STB90 Solar Traffic Post Bollards Cap

Key Features

1. Energy-saving
2. Easy to install and maintain
3. Visible from 800 meters

Specification

Used for Dia.90MM bollard
 Working type after full charge: over 72 hours (Flashing)
 Auto-Turn On: Start working from 500 Lux
 Material: PC+ABS
 Solar Cell type: Mono crystalline
 Work temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 LED Source: 8 pcs Ultra bright LEDs
 Use life: Over 100 000 hours
 LED Color: yellow (Or Customized)
 Battery type: High Quality Ni-MH Batteries
 Work Type: Flashing 2 HZ
 Service Life: 3-5 years
 Package: 1 pc in one box
 50pcs/Carton

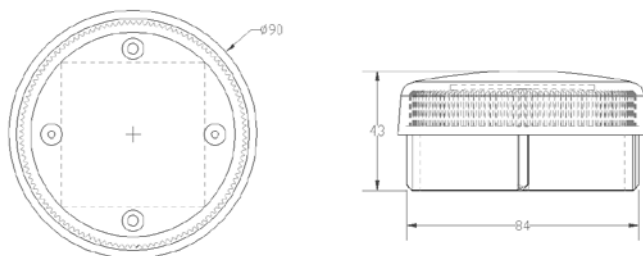

Project Reference





Traffic Post Delineator bollard

Height: 100cm
 Weight: 3.5kgs 1.5kgs
 Dia.200mm
 Material: HDPE
 With Reflective films



Springback traffic bollard

Height: 75cm 45cm
 Weight: 3.5kgs 1.5kgs
 Dia.80mm
 Base:Dia.200mm
 Material: TPU, PU, PVC PE EVA



Springback traffic bollard

Height: 100cm
 Weight: 5 kgs
 Dia.100mm
 Base:Dia.200mm
 Material:PE +Rubber



Steel Road Bollards

Height	500mm
Weight	3.5kg
Diameter	110mm

530mm



Height	750mm
Weight	3.3kg
Bottom	360x360mm
Diameter	75mm

Lane Divider



Rubber lane divider
 Flag size:22*15*28cm
 Total weight: 2 kgs

D3



Rubber lane divider

Height	330mm
Weight	1.5kg
Base Size	210×150mm

Flag size:22*15*33cm

Total weight: 2.4kgs



02




450mm

350mm

长度 Length	1000mm
底宽 Bottom Width	250mm
高度 Height	450mm/350mm
重量 Weight	11.5kg

Traffic Post Delineators

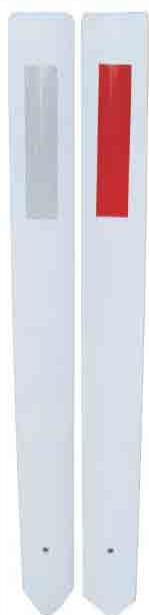

Slice PVC Delineators

Height: 935 mm
Width: 100mm
Thickness: 4mm
Weight: 0.7kg



Slice PVC Delineators

Height: 1000 mm
Width: 100mm
Thickness: 5mm
Weight: 0.82kg



Post PVC Delineators

Height: 1250 mm
Width: 130mm
Thickness: 3mm
Weight: 2.3 kg



Traffic Guardrail Delineators



Steel support Single side

Steel support Double Side



Trapezoid Guardrail Reflectors



Size: L120xW50xH70mm
Double sides with
double supports



Rectangle guardrail reflector
Size: L180 x W45 x H50mm
Double sides reflectors

Anti-Dazzle boards



Size: 900 x 220mm
Weight: 1.5 kgs



Size: 800 x 200mm
Weight: 1 kg



Size: 900 x 220mm
Weight: 1.5 kg



Size: 900 x 200mm
Weight: 0.65kg

