



TUNNEL SUBWAY GUIDANCE SERIES WIRED POWER LED ROAD MARKERS

**BESIDE THE SHELLS WE SUPPLYING NOW,
CUSTOMIED SHELL AVAILABLE FOR ALUMINUM TYPE**

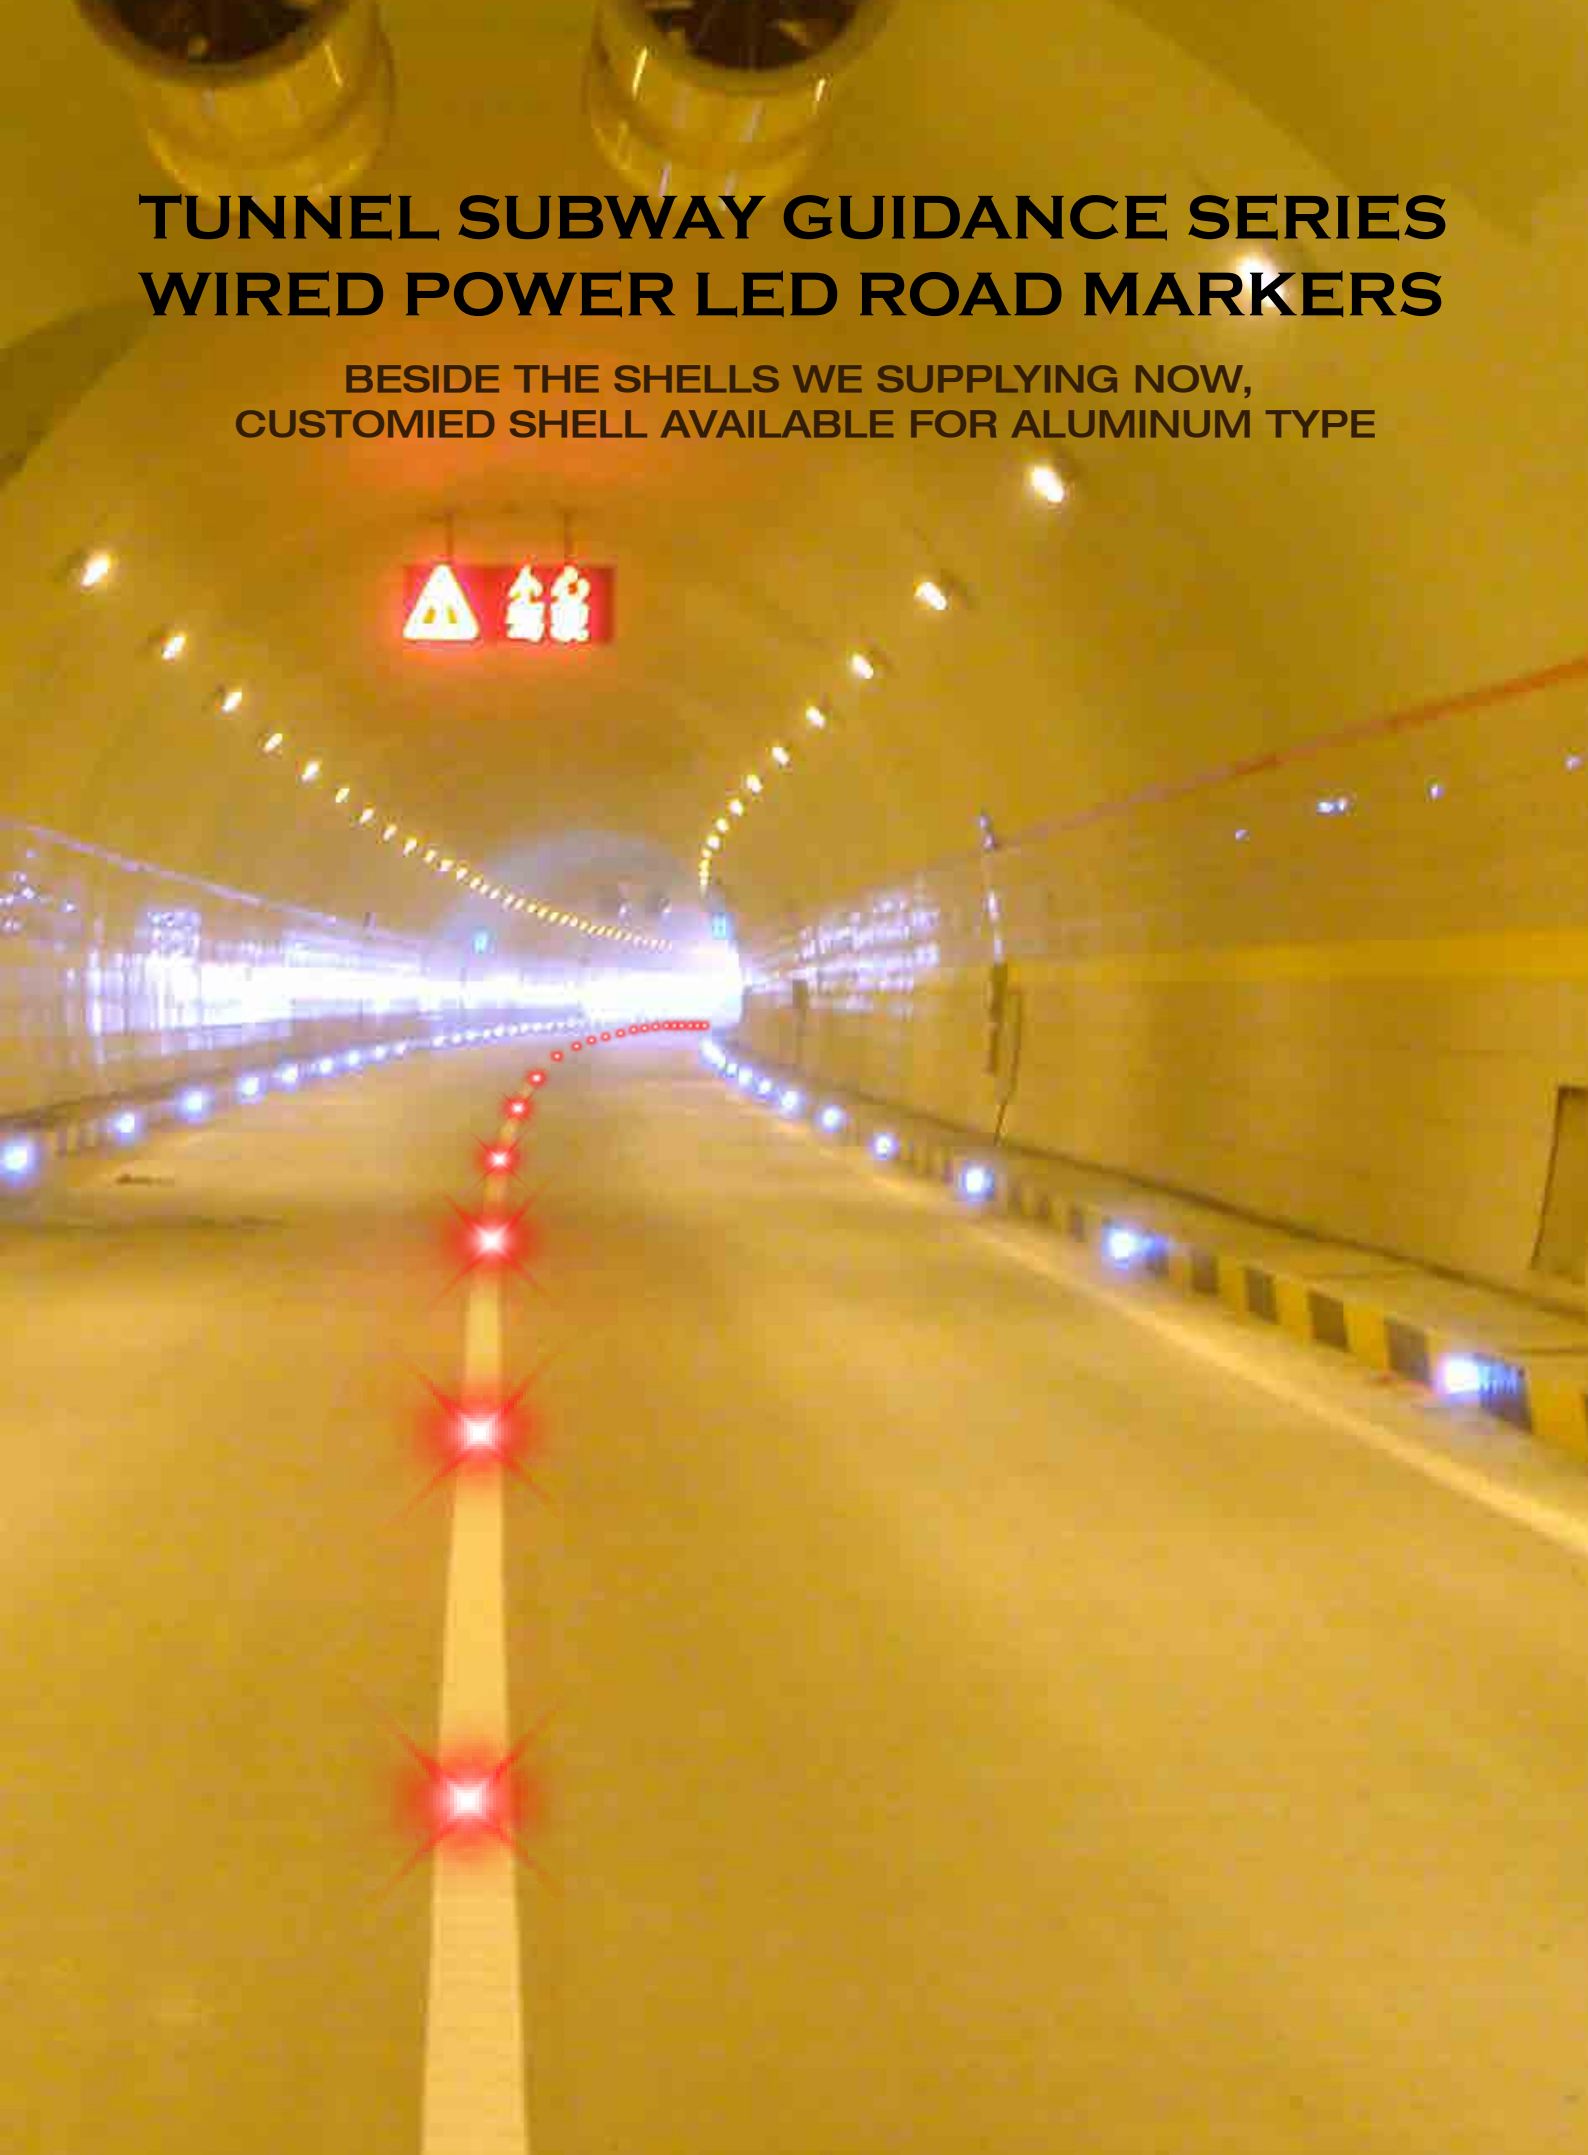

Item No: WPRS112

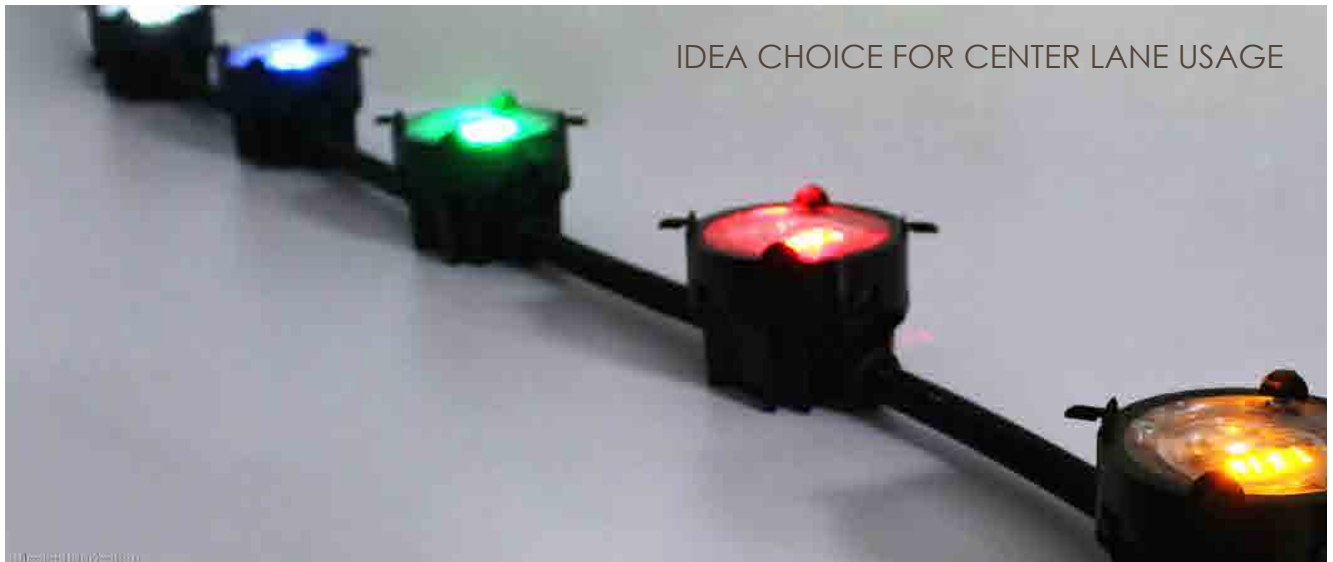

Applications :



Motorway



Dynamiclane



Crosswalk



Traffic Circle



Cycleway



Parking Lot



Park



Garden



Railway



Airport



Architecture




Key Feature

1. Visibility over 1000 meters
2. Easy to install and maintain
3. Definitely economical design: Lower unit cost and lower installation cost (smaller installation hole: dia.90mm)

Specification

1. Size: Dia.89mm (3.5 inch) X 65mm
2. Shell: Special PC
3. Shell Color: Black or customized
4. Compression resistance: over 20 tons
5. Water-proof: IP68
6. LED: 6 pcs supper bright LEDs
7. Frequency: steady or flashing according to the controller
8. Led color: white, red, yellow, green, blue
9. Working temperature: -40 degree - +70 degree
10. Viewing distance: >1000 meters
11. Power consume: <0.1W / pc
12. Weight: 0.350 KGS
13. Packing: 1 pc/box, 6pcs/carton, Carton size: 23*24*15cm

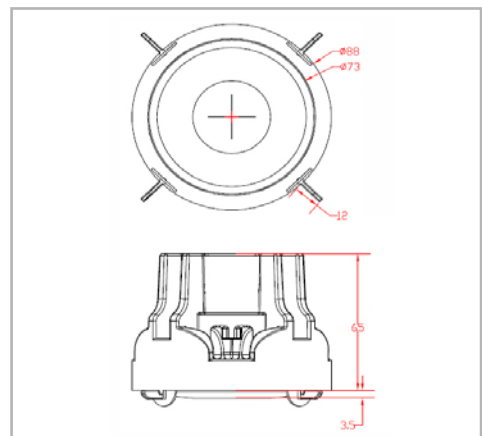

Item No: WPRS212



Applications :



Motorway



Dynamiclane



Crosswalk



Traffic Circle



Cycleway



Parking Lot



Park



Garden



Railway



Airport



Architecture




Key Feature

1. High quality ultra-bright LEDs 8 pcs X 2 sides
2. Perfect water proof: IP 68
3. Easy to install with 2 screws onto the wall, easy to repair and replace

Specification

1. Size: Dia.100mm, Height: 26mm
2. Shell Color: White or Black
3. Working type: Steady or flashing
4. Power supply: 12V-24V DC
5. Power consume: <1W
6. Material: PC
7. Ultra bright $\Phi 5\text{mm}$ LEDs, 8pcs X 2 sides, use life over 100 000 hours
8. LED Color: White, yellow, red, blue, green
9. Long use life over 5 years
10. Water proof IP68
11. Weight: 280g/pc
12. Package: 2pcs in one box
12pcs/carton, carton size: 22*22*12.5cm

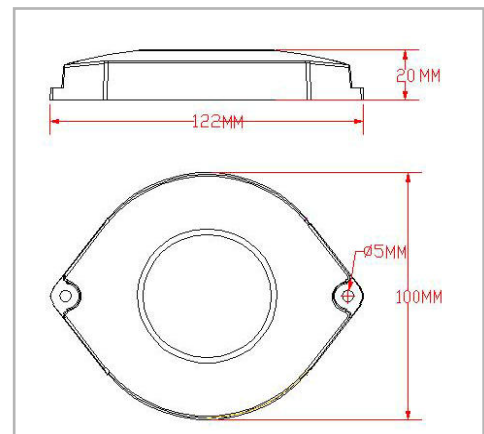

Item No: WPRS214



Applications :



Motorway



Dynamiclane



Crosswalk



Traffic Circle



Cycleway



Parking Lot



Park



Garden




Railway



Airport



Architecture




Key Feature

1. One direction or 2 directions optional
2. Each side 6 pcs LEDs
3. Perfect water proof - IP 68

Specification

1. Size: 100mmX 100mmX 20mm
2. Shell Color: White or customized
3. Working type: Steady or flashing
4. Power supply: 12V-24V DC
5. Power consume: <1W
6. Material: PC
7. Ultra bright $\Phi 5$ mm LEDs, 6pcs X 2 sides, use life over 100 000 hours
8. LED Color: White, yellow, red, blue, green
9. Long use life over 5 years
10. Water proof IP68
11. Weight: 280g/pc
12. Package: 2pcs in one box
12pcs/carton, carton size: 22*22*12.5cm

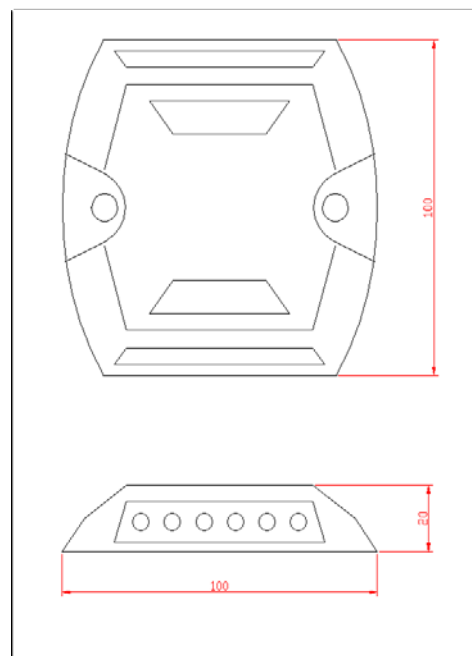

Item No: WPRS222



Applications :



Motorway



Dynamiclane



Crosswalk



Traffic Circle



Cycleway



Parking Lot



Park



Garden



Railway



Airport



Architecture




Key Feature

1. Visibility over 800 meters.
2. Lower unit cost and lower installation cost
3. Anti-pressure: 20 tons

Specification

1. Size: 110mm X 100mm X 20mm
2. Shell material : Aluminum
3. Compression resistance: over 20 tons
4. Water-proof: IP68
5. LED: 6 pcs Supper bright LEDs each side
6. Frequency: steady or flashing according to the controller
7. Led color: white, red, yellow, green, blue
8. Working temperature: -40 degree - +70 degree
9. Viewing distance: >800 meters
10. Power consume: <0.2W / pc
11. Power input: 12~24V DC

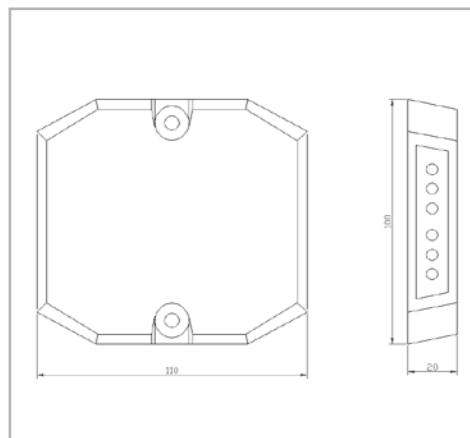

Item No: WPRS215



Applications :



Motorway



Dynamiclane



Crosswalk



Traffic Circle



Cycleway



Parking Lot



Park



Garden



Railway



Airport



Architecture




Key Feature

1. Visibility over 800 meters.
2. Lower unit cost and lower installation cost
3. Anti-pressure: 20 tons

Specification

1. Size: 82mm X 55mm X 23mm
2. Shell material : Aluminum
3. Compression resistance: over 20 tons
4. Water-proof: IP68
5. LED: 12 pcs Supper bright LEDs each side
6. Frequency: steady or flashing according to the controller
7. Led color: white, red, yellow, green, blue
8. Working temperature: -40 degree - +70 degree
9. Viewing distance: >800 meters
10. Power consume: <1W / pc
11. Power input: 12~24V DC

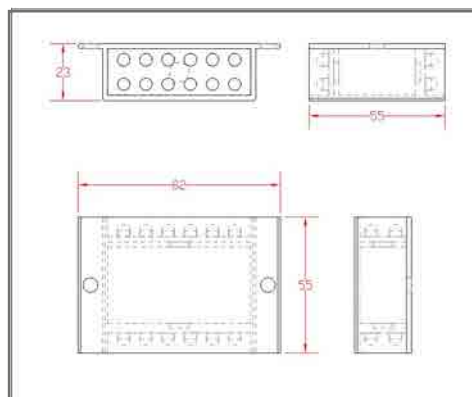

Other Products in Tunnel Safety Series



Item No: B031 CONTROLLERS FOR MARKERS

Input Power: 220V AC
Output: 12-24V DC
Functions:
Continuely On
Flashing 2 HZ
5 Push Sequentially Flashing



Controller Case
Customizedable for different sizes



Item No: B032
Side Emergency Guidance Markers

Input: 12-24V DC
Power: 1W
LED Quantity: 15 pcs
LED Color: Green, White, Yellow, Red, Blue



Item No.: B033 Escape LED Illuminated Signals



Item No.: B034

Changeable Tunnel Speed Display

Item No.: B035

LED Lane Directional Display



